


# REDUCCION CONCENTRICA-EXCENTRICA DUAL PN10

## TERMOPLASTICO REFORZADO CON PRFV

### REFUERZO PRFV MANUAL CON ANTICORROSION EN PPH

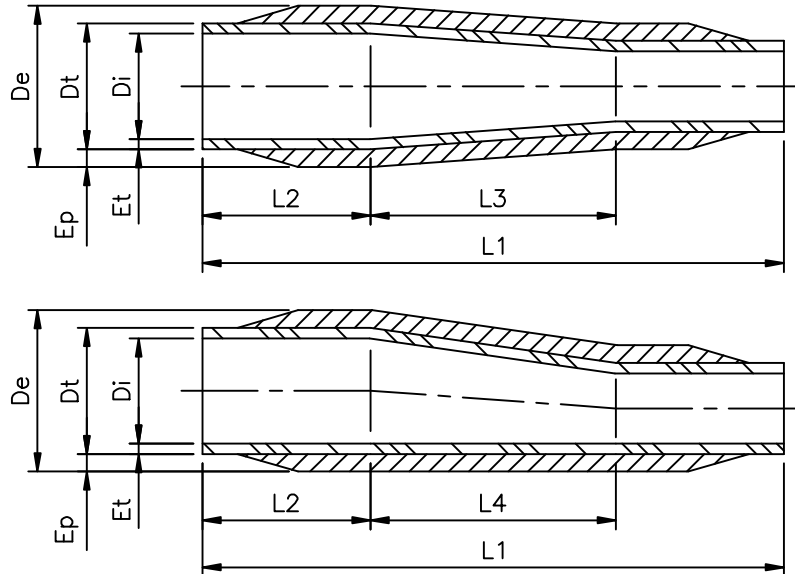

DN	L1	L2	L3	L4	DN MAYOR				DN MENOR				PRFV Ep
					De	Di	Dt	Et	De	Di	Dt	Et	
32x25	180	85	20	20	46.4	32.6	40	3.7	38.4	26	32	3	3.2
40x25	205	85	45	45	56.4	40.8	50	4.6	38.4	26	32	3	3.2
40x32	200	85	25	25	56.4	40.8	50	4.6	46.4	32.6	40	3.7	3.2
50x25	235	85	80	80	69.4	55.8	63	3.6	38.4	26	32	3	3.2
50x32	230	85	60	60	69.4	55.8	63	3.6	46.4	32.6	40	3.7	3.2
50x40	205	85	35	35	69.4	55.8	63	3.6	56.4	40.8	50	4.6	3.2
65x32	260	85	90	90	81.4	66.4	75	4.3	46.4	32.6	40	3.7	3.2
65x40	235	85	65	60	81.4	66.4	75	4.3	56.4	40.8	50	4.6	3.2
65x50	210	85	30	30	81.4	66.4	75	4.3	69.4	55.8	63	3.6	3.2
80x40	275	85	105	100	97.4	83	90	3.5	57.4	40.8	50	4.6	3.7
80x50	245	85	70	65	97.4	83	90	3.5	70.4	55.8	63	3.6	3.7
80x65	210	85	40	40	97.4	83	90	3.5	82.4	66.4	75	4.3	3.7
100x50	325	110	95	90	118.4	101.4	110	4.3	71.4	55.8	63	3.6	4.2
100x65	285	110	90	85	118.4	101.4	110	4.3	83.4	66.4	75	4.3	4.2
100x80	250	110	50	50	118.4	101.4	110	4.3	98.4	83	90	3.5	4.2
125x65	350	110	130	125	134.4	115.2	125	4.9	84.4	66.4	75	4.3	4.7
125x80	310	110	90	85	134.4	115.2	125	4.9	99.4	83	90	3.5	4.7
125x100	285	110	40	40	134.4	115.2	125	4.9	119.4	101.4	110	4.3	4.7
150x80	375	110	180	175	170.4	152.2	160	3.9	100.4	83	90	3.5	5.2
150x100	350	110	130	125	170.4	152.2	160	3.9	120.4	101.4	110	4.3	5.2
150x125	310	110	90	85	170.4	152.2	160	3.9	135.4	115.2	125	4.9	5.2

PPH+PRFV

DN: Diametro Nominal, en mm.  
Inf. bajo reserva de cambios sin previo aviso.

PN: Presion Nominal en kg/cm<sup>2</sup>  
Cotas: Expresadas en mm.

OLLEARIS S.A. Telf. +34.935796520 Fax. 34.935933616  
E-mail. ollesa@ollearis.org Web. <http://www.ollearis.org>