


# REDUCCION CONCENTRICA-EXCENTRICA DUAL PN10

## TERMOPLASTICO REFORZADO CON PRFV

### REFUERZO PRFV MANUAL CON ANTICORROSION EN PVDF

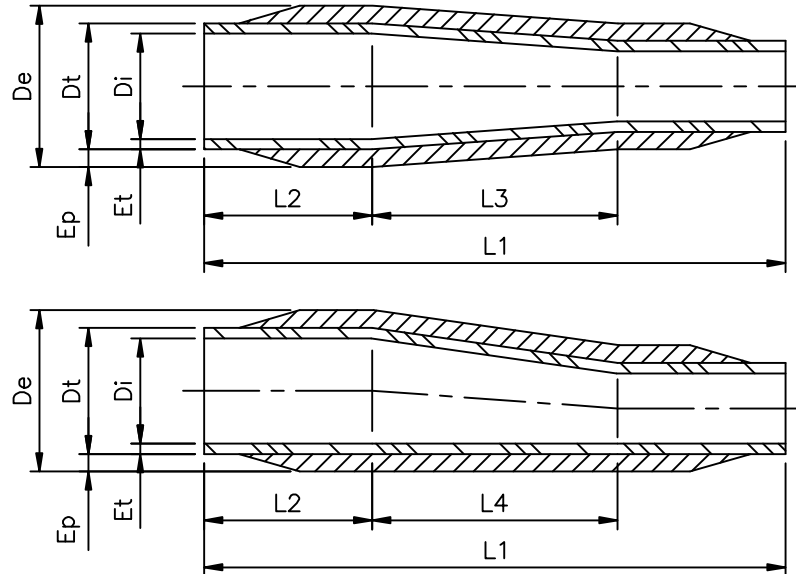

DN	L1	L2	L3	L4	DN MAYOR				DN MENOR				PRFV Ep
					De	Di	Dt	Et	De	Di	Dt	Et	
200x100	495	127	230	225	213.4	194	200	3	123.4	104	110	3	6.7
200x125	430	127	195	185	213.4	194	200	3	138.4	119	125	3	6.7
200x150	370	127	105	100	212.4	194	200	3	173.4	154	160	3	6.7
250x125	575	143	320	310	265.4	244	250	3	140.4	119	125	3	7.7
250x150	510	143	230	225	265.4	244	250	3	175.4	154	160	3	7.7
250x200	400	143	130	130	265.4	244	250	3	215.4	194	200	3	7.7
300x150	655	158	360	345	333.4	307	315	4	178.4	154	160	3	9.2
300x200	540	158	255	245	333.4	307	315	4	218.4	194	200	3	9.2
300x250	435	158	130	125	333.4	307	315	4	268.4	244	250	3	9.2
350x200	665	150	400	385	375.4	345	355	5	220.4	194	200	3	10.2
350x250	550	150	270	260	375.4	345	355	5	270.4	244	250	3	10.2
350x300	440	150	140	135	375.4	345	355	5	335.4	307	315	4	10.2
400x250	695	166	385	370	423.4	390	400	5	273.4	244	250	3	11.7
400x300	580	166	255	245	423.4	390	400	5	338.4	307	315	4	11.7
400x350	450	166	115	110	423.4	390	400	5	378.4	345	355	5	11.7

PVDF+PRFV

11/01 FT179

DN: Diametro Nominal, en mm. PN: Presion Nominal en kg/cm<sup>2</sup>  
 Inf. bajo reserva de cambios sin previo aviso. Cotas: Expresadas en mm.

OLLEARIS S.A. Telf. +34.935796520 Fax. 34.935933616  
 E-mail. ollesa@ollearis.org Web. http://www.ollearis.org