


REDUCCIONES EN PRFV CONCENTRICAS-EXCENTRICAS



PRFV

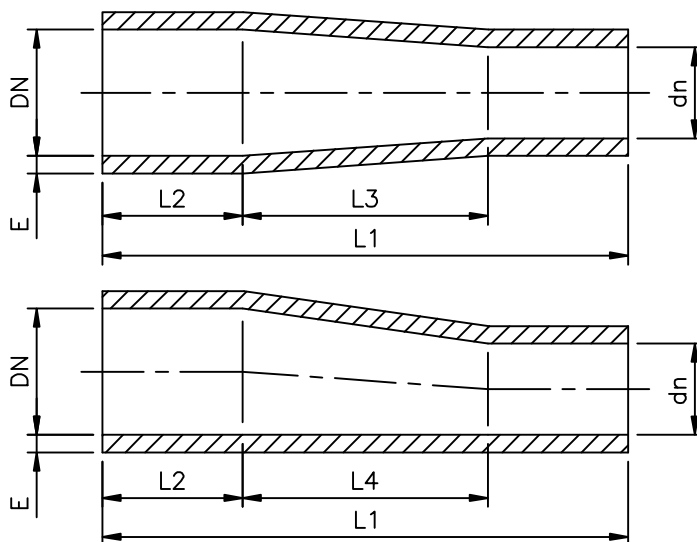

DN	L1	L2	L3	L4	ESPESOR "E"				
					PN2.5	PN4	PN6	PN10	PN16
600x350	980	181	645	620	6.5	9.0	12.0	18.0	-
600x400	865	181	515	495	6.5	9.0	12.0	18.0	-
600x500	630	181	255	245	6.5	9.0	12.0	18.0	-
700x400	1160	197	775	740	7.0	10.0	13.5	20.5	-
700x500	930	197	515	495	7.0	10.0	13.5	20.5	-
700x600	660	197	255	245	7.0	10.0	13.5	20.5	-
800x500	1180	213	775	740	8.0	11.0	15.0	22.5	-
800x600	910	213	515	495	8.0	11.0	15.0	22.5	-
800x700	665	213	255	245	8.0	11.0	15.0	22.5	-
900x600	1185	230	775	740	8.5	12.0	16.5	26.0	-
900x700	945	230	515	495	8.5	12.0	16.5	26.0	-
900x800	700	230	255	245	8.5	12.0	16.5	26.0	-
1000x700	1220	245	775	740	9.0	13.0	18.0	28.5	-
1000x800	975	245	515	495	9.0	13.0	18.0	28.5	-
1000x900	735	245	255	245	9.0	13.0	18.0	28.5	-

4/04 FT123

DN: Diametro Nominal = Diametro Interior, en mm.
 AC: Barrera Anticorrosion Interna de 2.5 mm
 Inf. bajo reserva de cambios sin previo aviso.

PN: Presion Nominal en kg/cm²
 Cotas: Expresadas en mm.

OLLEARIS S.A. Telf. +34.935796520 Fax. 34.935933616
 E-mail. ollesa@ollearis.org Web. <http://www.ollearis.org>