


REDUCCIONES EN PRFV CONCENTRICAS-EXCENTRICAS



PRFV

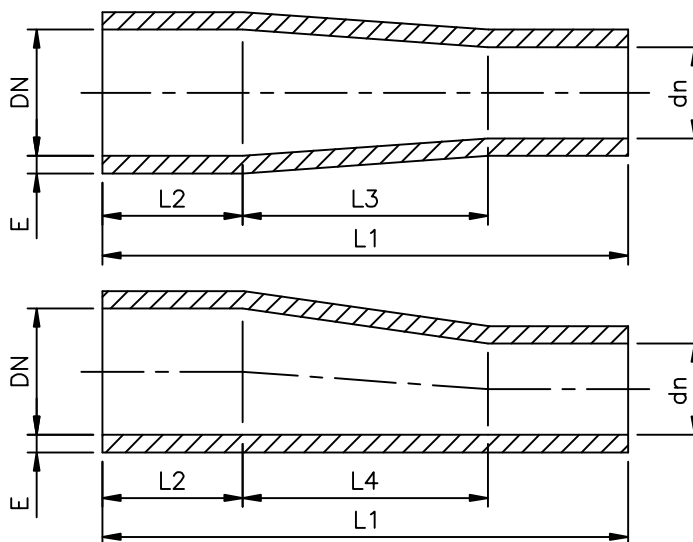

DN	L1	L2	L3	L4	ESPESOR "E"				
					PN2.5	PN4	PN6	PN10	PN16
32x25	180	85	20	20	5.0	5.0	5.0	5.0	5.0
40x25	205	85	40	40	5.0	5.0	5.0	5.0	5.0
40x32	200	85	20	20	5.0	5.0	5.0	5.0	5.0
50x25	235	85	65	60	5.0	5.0	5.0	5.0	6.0
50x32	230	85	45	45	5.0	5.0	5.0	5.0	6.0
50x40	205	85	25	25	5.0	5.0	5.0	5.0	6.0
65x32	260	85	85	80	5.0	5.0	5.0	5.0	6.5
65x40	235	85	65	60	5.0	5.0	5.0	5.0	6.5
65x50	210	85	40	40	5.0	5.0	5.0	5.0	6.5
80x40	275	85	105	100	5.0	5.0	5.0	5.0	6.0
80x50	245	85	75	75	5.0	5.0	5.0	5.0	6.0
80x65	210	85	40	35	5.0	5.0	5.0	5.0	6.0
100x50	325	110	130	125	5.0	5.0	5.0	5.5	7.0
100x65	285	110	90	85	5.0	5.0	5.0	5.5	7.0
100x80	250	110	50	50	5.0	5.0	5.0	5.5	7.0
125x65	350	110	155	150	5.0	5.0	5.0	6.0	8.0
125x80	310	110	115	110	5.0	5.0	5.0	6.0	8.0
125x100	285	110	65	60	5.0	5.0	5.0	6.0	8.0
150x80	375	110	180	175	5.0	5.0	5.0	6.5	9.0
150x100	350	110	130	125	5.0	5.0	5.0	6.5	9.0
150x125	310	110	65	60	5.0	5.0	5.0	6.5	9.0

4/04 FT121

DN: Diametro Nominal = Diametro Interior, en mm.

AC: Barrera Anticorrosion Interna de 2.5 mm

Inf. bajo reserva de cambios sin previo aviso.

PN: Presion Nominal en kg/cm²

Cotas: Expresadas en mm.

OLLEARIS S.A. Telf. +34.935796520 Fax. 34.935933616

E-mail. ollesa@ollearis.org Web. <http://www.ollearis.org>