


# REDUCCIONES EN PRFV CONCENTRICAS-EXCENTRICAS



PRFV

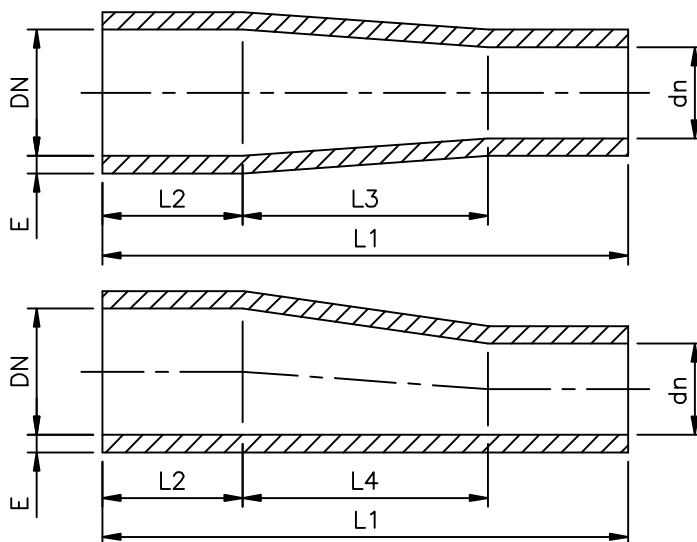

DN	L1	L2	L3	L4	ESPESOR "E"				
					PN2.5	PN4	PN6	PN10	PN16
200x100	495	127	255	245	5.0	5.0	6.0	8.0	11.0
200x125	430	127	195	185	5.0	5.0	6.0	8.0	11.0
200x150	370	127	130	125	5.0	5.0	6.0	8.0	11.0
250x125	575	143	320	310	5.0	5.0	6.5	9.0	13.0
250x150	510	143	255	245	5.0	5.0	6.5	9.0	13.0
250x200	400	143	130	125	5.0	5.0	6.5	9.0	13.0
300x150	655	158	385	370	5.0	5.5	7.5	10.5	15.0
300x200	540	158	255	245	5.0	5.5	7.5	10.5	15.0
300x250	435	158	130	125	5.0	5.5	7.5	10.5	15.0
350x200	665	150	385	370	5.0	6.0	8.0	11.5	17.5
350x250	550	150	255	245	5.0	6.0	8.0	11.5	17.5
350x300	440	150	130	125	5.0	6.0	8.0	11.5	17.5
400x250	695	166	385	370	5.5	6.5	9.0	13.0	19.5
400x300	580	166	255	245	5.5	6.5	9.0	13.0	19.5
400x350	450	166	130	125	5.5	6.5	9.0	13.0	19.5
450x300	730	180	375	375	5.5	7.5	10.0	14.5	21.5
450x350	600	180	250	250	5.5	7.5	10.0	14.5	21.5
450x400	480	180	125	125	5.5	7.5	10.0	14.5	21.5
500x300	865	191	515	495	6.0	8.0	10.5	15.5	23.5
500x350	730	191	385	370	6.0	8.0	10.5	15.5	23.5
500x400	615	191	255	245	6.0	8.0	10.5	15.5	23.5

4/04 FT122

DN: Diametro Nominal = Diametro Interior, en mm.

AC: Barrera Anticorrosion Interna de 2.5 mm

Inf. bajo reserva de cambios sin previo aviso.

PN: Presion Nominal en kg/cm<sup>2</sup>

Cotas: Expresadas en mm.

OLLEARIS S.A. Telf. +34.935796520 Fax. 34.935933616

E-mail. ollesa@ollearis.org Web. <http://www.ollearis.org>