


TES IGUALES EN PRFV



PRFV

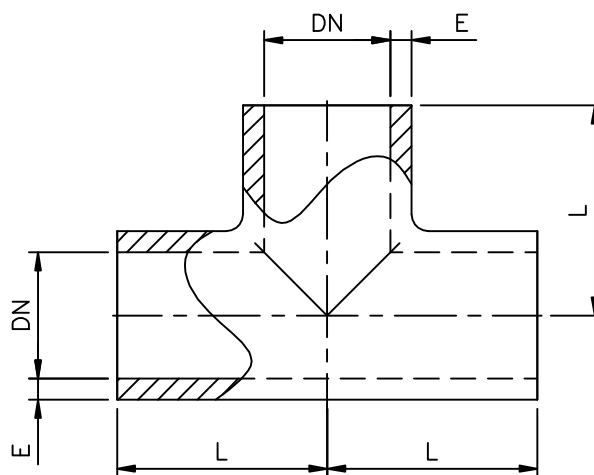

DN	L	ESPESOR "E"				
		PN2.5	PN4	PN6	PN10	PN16
25	110	5.0	5.0	5.0	5.0	5.0
32	130	5.0	5.0	5.0	5.0	5.0
40	150	5.0	5.0	5.0	5.0	5.0
50	180	5.0	5.0	5.0	5.0	6.0
65	140	5.0	5.0	5.0	5.0	6.5
80	165	5.0	5.0	5.0	5.0	6.0
100	205	5.0	5.0	5.0	5.5	7.0
125	245	5.0	5.0	5.0	6.0	8.0
150	285	5.0	5.0	5.0	6.5	9.0
200	365	5.0	5.0	6.0	8.0	10.5
250	450	5.0	5.0	6.5	9.0	13.0
300	525	5.0	5.5	7.5	10.5	15.0
350	600	5.0	6.0	8.0	11.5	17.5
400	680	5.5	6.5	9.0	13.0	19.5
450	750	5.5	7.5	10.0	14.5	21.5
500	830	6.0	8.0	10.5	15.5	23.5
600	950	6.5	9.0	12.0	18.0	—
700	1100	7.0	10.0	13.5	20.5	—
800	1250	8.0	11.0	15.0	22.5	—
900	1400	8.5	12.0	16.5	26.0	—
1000	1500	9.0	13.0	18.0	28.5	—

4/04 FT115

DN: Diametro Nominal = Diametro Interior, en mm.

AC: Barrera Anticorrosion Interna de 2.5 mm

Inf. bajo reserva de cambios sin previo aviso.

PN: Presion Nominal en kg/cm²

Cotas: Expresadas en mm.

OLLEARIS S.A. Telf. +34.935796520 Fax. 34.935933616

E-mail. ollesa@ollearis.org Web. <http://www.ollearis.org>