


TUBO DUAL PN 10

TERMOPLASTICO REFORZADO CON PRFV

REFUERZO PRFV POR ENROLLAMIENTO MECANICO CON ANTICORROSION PVC

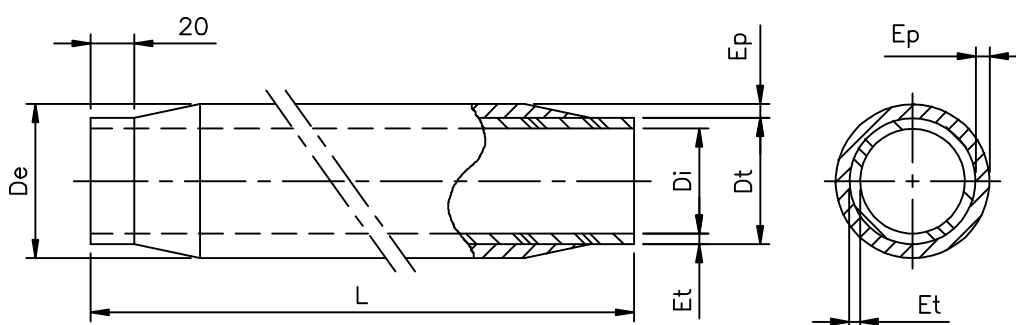

PVC+PRFV

DN	De	Di	L (APROX.)	PVC Dt	PVC Et	PRFV Ep
125	131.6	118.8	6000	125	3.1	3.3
150	166.6	152	6000	160	4	3.3
200	206.6	190.2	6000	200	4.9	3.3
250	256.6	240.2	6000	250	4.9 (1)	3.3
300	322.6	306	6000	315	4.5 (2)	3.8
350	363.2	346	6000	355	4.5 (3)	4.1
400	409.2	390	6000	400	5 (4)	4.6
500	511	490	6000	500	5 (5)	5.5

4/04 FT140

NOTA Para pequeñas series espesores "ET": (1)=6.2, (2)=7.7, (3)=7, (4)=9.8, (5)=12.3
 DN: Diametro Nominal, en mm. PN: Presion Nominal en kg/cm²
 Inf. bajo reserva de cambios sin previo aviso. Cotas: Expresadas en mm.

OLLEARIS S.A. Telf. +34.935796520 Fax. 34.935933616
 E-mail. ollesa@ollearis.org Web. <http://www.ollearis.org>