


# TUBO DUAL PN 10

## TERMOPLASTICO REFORZADO CON PRFV

### REFUERZO PRFV POR ENROLLAMIENTO MECANICO CON ANTICORROSION PVDF

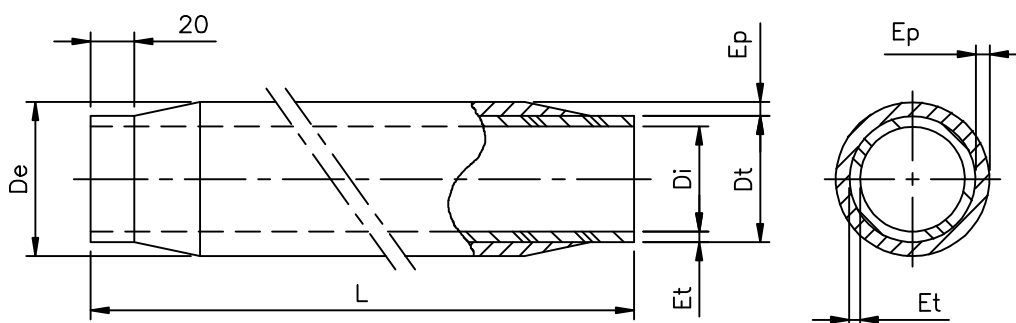

DN	De	Di	L (APROX.)	PVDF Dt	PVDF Et	PRFV Ep
125	131.6	119	6000	125	3	3.3
150	166.6	154	6000	160	3	3.3
200	206.6	194	6000	200	3	3.3
250	256.6	244	6000	250	3	3.3
300	322.6	307	6000	315	4	3.8
350	363.2	345	6000	355	5	4.1
400	409.2	390	6000	400	5	4.6

PVDF+PRFV

4/04 FT161

DN: Diametro Nominal, en mm.  
Inf. bajo reserva de cambios sin previo aviso.

PN: Presion Nominal en kg/cm<sup>2</sup>  
Cotas: Expresadas en mm.

OLLEARIS S.A. Telf. +34.935796520 Fax. 34.935933616  
E-mail. ollesa@ollearis.org Web. <http://www.ollearis.org>