


TUBO EN PRFV MOLDEADO POR ENROLLAMIENTO MECANICO



PRFV

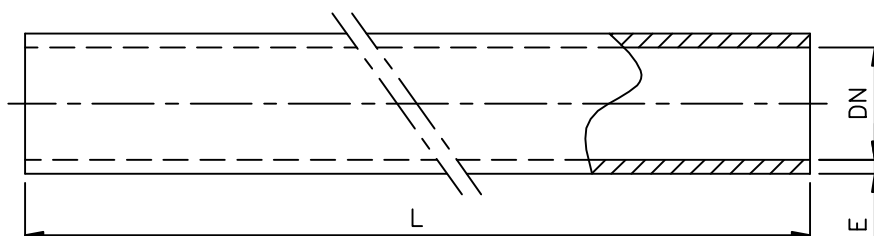

DN	L	ESPESOR "E"				
		PN2.5	PN4	PN6	PN10	PN16
125	10000	5.0	5.0	5.0	5.0	5.0
150	10000	5.0	5.0	5.0	5.0	5.1
200	12000	5.0	5.0	5.0	5.0	6
250	12000	5.0	5.0	5.0	5.2	6.8
300	12000	5.0	5.0	5.0	5.7	7.7
350	12000	5.0	5.0	5.0	6.3	8.6
400	12000	5.0	5.0	5.1	6.8	9.5
450	12000	5.0	5.0	5.4	7.4	10.3
500	12000	5.0	5.0	5.7	7.9	11.2
600	12000	5.0	5.1	6.4	9	12.9
700	12000	5.0	5.5	7	10.1	14.7
800	12000	5.0	5.9	7.7	11.1	16.4
900	12000	5.0	6.4	8.3	12.2	18.1
1000	12000	5.2	6.8	8.9	13.3	19.9
1100	12000	5.4	7.2	9.6	14.4	21.6
1200	12000	5.7	7.6	10.2	15.4	23.4
1300	12000	6	8.1	10.9	16.5	25.1
1400	12000	6.2	8.5	11.5	17.6	26.8
1500	12000	6.5	8.9	12.2	18.7	28.6
1600	12000	6.8	9.4	12.8	19.8	30.3
1700	12000	7	9.8	13.5	20.8	—
1800	12000	7.3	10.2	14.1	21.9	—
1900	12000	7.6	10.6	14.7	23	—
2000	12000	7.9	11.1	15.4	24.1	—
2200	12000	8.4	11.9	16.7	26.2	—
2400	12000	8.9	12.8	18	28.4	—

4/04 FT103

DN: Diametro Nominal = Diametro Interior, en mm.

AC: Barrera Anticorrosion Interna de 2.5 mm

Inf. bajo reserva de cambios sin previo aviso.

PN: Presion Nominal en kg/cm²

Cotas: Expresadas en mm.

OLLEARIS S.A. Telf. +34.935796520 Fax. 34.935933616

E-mail. ollesa@ollearis.org Web. <http://www.ollearis.org>