


TUBO DUAL PN 10

TERMOPLASTICO REFORZADO CON PRFV

REFUERZO PRFV MANUAL

CON ANTICORROSION PPH

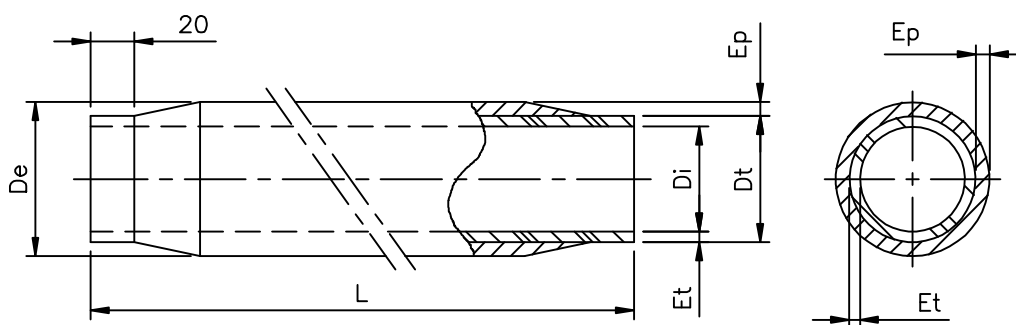

PPH+PRFV

DN	De	Di	L (APROX.)	PPH Dt	PPH Et	PRFV Ep
25	37.8	26	5000	32	3	2.9
32	45.8	32.6	5000	40	3.7	2.9
40	55.8	40.8	5000	50	4.6	2.9
50	68.8	55.8	6000	63	3.6	2.9
65	80.8	66.4	6000	75	4.3	2.9
80	96.8	83	6000	90	3.5	3.4
100	117.8	101.4	6000	110	4.3	3.9
125	133.8	115.2	6000	125	4.9	4.4
150	169.8	152.2	6000	160	3.9	4.9
200	212.8	190.2	6000	200	4.9	6.4
250	264.8	237.8	6000	250	6.1	7.4
300	332.8	299.6	6000	315	7.7	8.9
350	374.8	337.6	6000	355	8.7	9.9
400	422.8	380.4	6000	400	9.8	11.4
500	527.8	476	6000	500	12	13.9

4/04 FT150

DN: Diametro Nominal, en mm.
 Inf. bajo reserva de cambios sin previo aviso.

PN: Presion Nominal en kg/cm²
 Cotas: Expresadas en mm.

OLLEARIS S.A. Telf. +34.935796520 Fax. 34.935933616
 E-mail. ollesa@ollearis.org Web. <http://www.ollearis.org>