


TUBO DUAL PN 10

TERMOPLASTICO REFORZADO CON PRFV

REFUERZO PRFV MANUAL

CON ANTICORROSION PVC

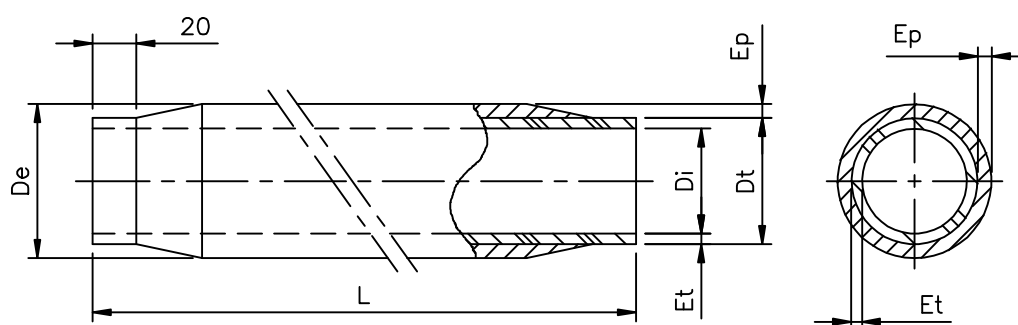

PVC+PRFV

DN	De	Di	L (APROX.)	PVC Dt	PVC Et	PRFV Ep
25	38.4	26.2	5000	32	2.9	3.2
32	46.4	34	5000	40	3	3.2
40	56.4	42.6	5000	50	3.7	3.2
50	69.4	57	6000	63	3	3.2
65	81.4	67.8	6000	75	3.6	3.2
80	97.4	84.6	6000	90	2.7	3.7
100	118.4	104.6	6000	110	2.7	4.2
125	134.4	118.8	6000	125	3.1	4.7
150	170.4	152	6000	160	4	5.2
200	213.4	190.2	6000	200	4.9	6.7
250	265.4	240.2	6000	250	4.9 (1)	7.7
300	333.4	306	6000	315	4.5 (2)	9.2
350	375.4	346	6000	355	4.5 (3)	10.2
400	423.4	390	6000	400	5 (4)	11.7
500	528.4	490	6000	500	5 (5)	14.2

NOTA Para pequeñas series espesores "ET": (1)=6.2, (2)=7.7, (3)=7, (4)=9.8, (5)=12.3
 DN: Diametro Nominal, en mm. PN: Presion Nominal en kg/cm²
 Inf. bajo reserva de cambios sin previo aviso. Cotas: Expresadas en mm.

OLLEARIS S.A. Telf. +34.935796520 Fax. 34.935933616
 E-mail. ollesa@ollearis.org Web. <http://www.ollearis.org>