


# TUBO DUAL PN 10

## TERMOPLASTICO REFORZADO CON PRFV

### REFUERZO PRFV MANUAL

### CON ANTICORROSION PVDF

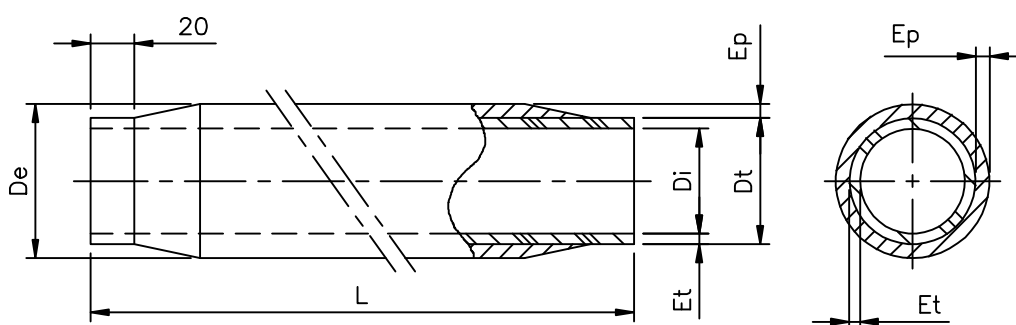

DN	De	Di	L (APROX.)	PVDF Dt	PVDF Et	PRFV Ep
25	38.4	27.2	5000	32	2.4	3.2
32	46.4	35.2	5000	40	2.4	3.2
40	56.4	44.2	5000	50	2.9	3.2
50	69.4	57	6000	63	3	3.2
65	83.4	69	6000	75	3	4.2
80	100.4	84	6000	90	3	5.2
100	120.4	104	6000	110	3	5.2
125	134.4	119	6000	125	3	4.7
150	170.4	154	6000	160	3	5.2
200	212.2	194	6000	200	3	6.2
250	265.4	244	6000	250	3	7.7
300	333.4	307	6000	315	4	9.2
350	376.4	345	6000	355	5	10.7
400	423.4	390	6000	400	5	11.7

PVDF+PRFV

4/04 FT160

DN: Diametro Nominal, en mm.  
 Inf. bajo reserva de cambios sin previo aviso.

PN: Presion Nominal en kg/cm<sup>2</sup>  
 Cotas: Expresadas en mm.

OLLEARIS S.A. Telf. +34.935796520 Fax. 34.935933616  
 E-mail. ollesa@ollearis.org Web. <http://www.ollearis.org>