


# REDUCCION CONCENTRICA-EXCENTRICA DUAL PN10

## TERMOPLASTICO REFORZADO CON PRFV

### REFUERZO PRFV MANUAL CON ANTICORROSION EN PPH

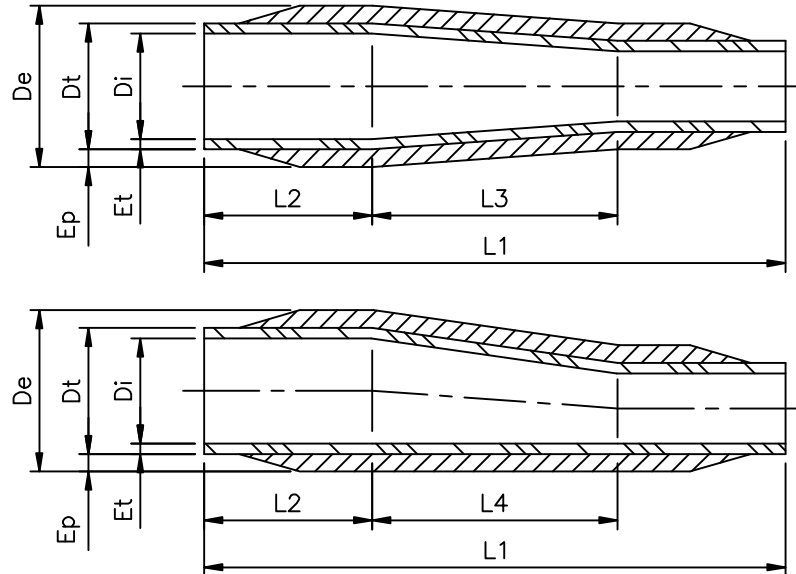

DN	L1	L2	L3	L4	DN MAYOR				DN MENOR				PRFV Ep
					De	Di	Dt	Et	De	Di	Dt	Et	
200x100	495	127	230	225	213.4	190.2	200	4.9	123.4	101.4	110	4.3	6.7
200x125	430	127	195	185	213.4	190.2	200	4.9	138.4	115.2	125	4.9	6.7
200x150	370	127	105	100	212.4	190.2	200	4.9	173.4	152.2	160	3.9	6.7
250x125	575	143	320	310	265.4	237.8	250	6.1	140.4	115.2	125	4.9	7.7
250x150	510	143	230	225	265.4	237.8	250	6.1	175.4	152.2	160	3.9	7.7
250x200	400	143	130	130	265.4	237.8	250	6.1	215.4	190.2	200	4.9	7.7
300x150	655	158	360	345	333.4	299.6	315	7.7	178.4	152.2	160	3.9	9.2
300x200	540	158	255	245	333.4	299.6	315	7.7	218.4	190.2	200	4.9	9.2
300x250	435	158	130	125	333.4	299.6	315	7.7	270.4	237.8	250	6.1	9.2
350x200	665	150	400	385	375.4	337.6	355	8.7	220.4	190.2	200	4.9	10.2
350x250	550	150	270	260	375.4	337.6	355	8.7	270.4	237.8	250	6.1	10.2
350x300	440	150	140	135	375.4	337.6	355	8.7	335.4	299.6	315	7.7	10.2
400x250	695	166	385	370	423.4	380.4	400	9.8	273.4	237.8	250	6.1	11.7
400x300	580	166	255	245	423.4	380.4	400	9.8	338.4	299.6	315	7.7	11.7
400x350	450	166	115	110	423.4	380.4	400	9.8	378.4	337.6	355	8.7	11.7
500x300	865	191	515	495	528.4	476	500	12	343.4	299.6	315	7.7	14.2
500x350	730	191	375	360	528.4	476	500	12	383.4	337.6	355	8.7	14.2
500x400	615	191	255	245	528.4	476	500	12	428.4	380.4	400	9.8	14.2

PPH+PRFV

4/04 FT159

DN: Diametro Nominal, en mm.  
 Inf. bajo reserva de cambios sin previo aviso.

PN: Presion Nominal en kg/cm<sup>2</sup>  
 Cotas: Expresadas en mm.

OLLEARIS S.A. Telf. +34.935796520 Fax. 34.935933616  
 E-mail. ollesa@ollearis.org Web. <http://www.ollearis.org>