


REDUCCION CONCENTRICA-EXCENTRICA DUAL PN10

TERMOPLASTICO REFORZADO CON PRFV

REFUERZO PRFV MANUAL CON ANTICORROSION EN PVC

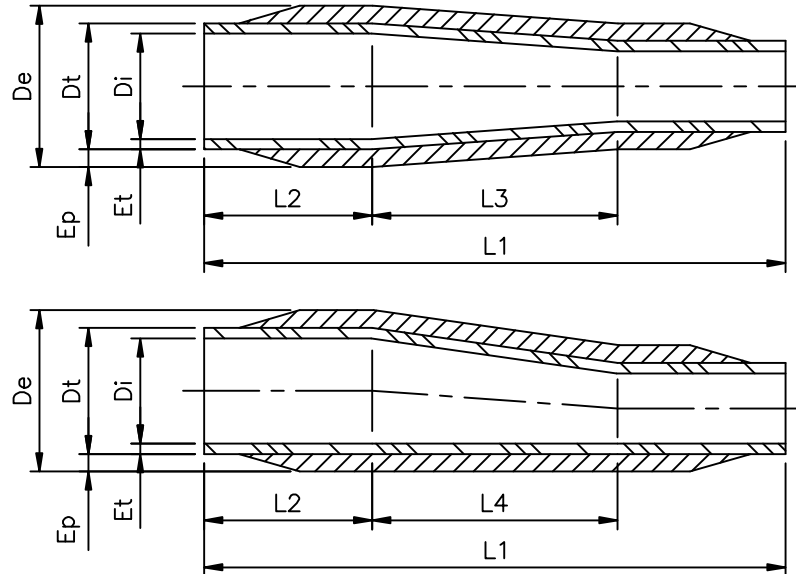

PVC+PRFV

| DN | L1 | L2 | L3 | L4 | DN MAYOR | | | | DN MENOR | | | | PRFV Ep |
|---------|-----|-----|-----|-----|----------|-------|-----|---------|----------|-------|-----|---------|------------|
| | | | | | De | Di | Dt | Et | De | Di | Dt | Et | |
| 200x100 | 495 | 127 | 230 | 225 | 213.4 | 190.2 | 200 | 4.9 | 123.4 | 104.6 | 110 | 2.7 | 6.7 |
| 200x125 | 430 | 127 | 195 | 185 | 213.4 | 190.2 | 200 | 4.9 | 138.4 | 118.8 | 125 | 3.1 | 6.7 |
| 200x150 | 370 | 127 | 105 | 100 | 212.4 | 190.2 | 200 | 4.9 | 173.4 | 152 | 160 | 4 | 6.7 |
| 250x125 | 575 | 143 | 320 | 310 | 265.4 | 240.2 | 250 | 4.9 (1) | 140.4 | 118.8 | 125 | 3.1 | 7.7 |
| 250x150 | 510 | 143 | 230 | 225 | 265.4 | 240.2 | 250 | 4.9 (1) | 175.4 | 152 | 160 | 4 | 7.7 |
| 250x200 | 400 | 143 | 130 | 130 | 265.4 | 240.2 | 250 | 4.9 (1) | 215.4 | 190.2 | 200 | 4.9 | 7.7 |
| 300x150 | 655 | 158 | 360 | 345 | 333.4 | 306 | 315 | 4.5 (2) | 178.4 | 152 | 160 | 4 | 9.2 |
| 300x200 | 540 | 158 | 255 | 245 | 333.4 | 306 | 315 | 4.5 (2) | 218.4 | 190.2 | 200 | 4.9 | 9.2 |
| 300x250 | 435 | 158 | 130 | 125 | 333.4 | 306 | 315 | 4.5 (2) | 268.4 | 240.2 | 250 | 4.9 (1) | 9.2 |
| 350x200 | 665 | 150 | 400 | 385 | 375.4 | 346 | 355 | 4.5 (3) | 220.4 | 190.2 | 200 | 4.9 | 10.2 |
| 350x250 | 550 | 150 | 270 | 260 | 375.4 | 346 | 355 | 4.5 (3) | 270.4 | 240.2 | 250 | 4.9 (1) | 10.2 |
| 350x300 | 440 | 150 | 140 | 135 | 375.4 | 346 | 355 | 4.5 (3) | 335.4 | 306 | 315 | 4.5 (2) | 10.2 |
| 400x250 | 695 | 166 | 385 | 370 | 423.4 | 390 | 400 | 5 (4) | 273.4 | 240.2 | 250 | 4.9 (1) | 11.7 |
| 400x300 | 580 | 166 | 255 | 245 | 423.4 | 390 | 400 | 5 (4) | 338.4 | 306 | 315 | 4.5 (2) | 11.7 |
| 400x350 | 450 | 166 | 115 | 110 | 423.4 | 390 | 400 | 5 (4) | 378.4 | 346 | 355 | 4.5 (3) | 11.7 |
| 500x300 | 865 | 191 | 515 | 495 | 528.4 | 490 | 500 | 5 (5) | 343.4 | 306 | 315 | 4.5 (2) | 14.2 |
| 500x350 | 730 | 191 | 375 | 360 | 528.4 | 490 | 500 | 5 (5) | 383.4 | 346 | 355 | 4.5 (3) | 14.2 |
| 500x400 | 615 | 191 | 255 | 245 | 528.4 | 490 | 500 | 5 (5) | 428.4 | 390 | 400 | 5 (4) | 14.2 |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |

NOTA Para pequeñas series espesores "ET": (1)=6.2, (2)=7.7, (3)=7, (4)=9.8, (5)=12.3
 DN: Diámetro Nominal, en mm. PN: Presión Nominal en kg/cm²
 Inf. bajo reserva de cambios sin previo aviso. Cotas: Expresadas en mm.

OLLEARIS S.A. Telf. +34.935796520 Fax. 34.935933616
 E-mail. ollesa@ollearis.org Web. http://www.ollearis.org